


ACCESSORIES

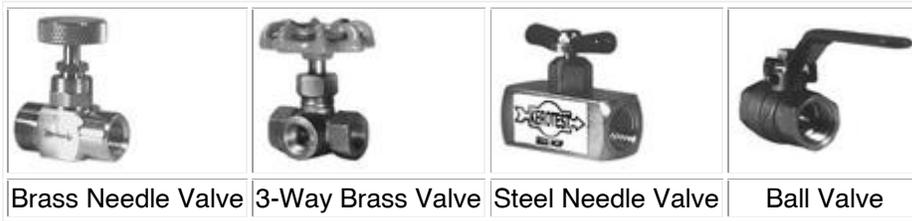

Needle for flow control & shut off. Ball for on/off. 3 way for fire speinkler gauge. Others available.

VALVES				
Type	Material	Temp WOG° F	PSI	Detail
Needle	Brass	150°	600	
	Carbon Steel	250°	3000 5000	
Ball	Brass	150°	600	
	Stainless	165°	800	
Three Way Brass		150°	200	

A [siphon](#) installed between the gauge and the live steam line allowsthe hot medium to cool before it reaches the gauge. Other variations and sizes are available.

SIPHONS					
Dia. MxM	Angle	Steel	Stainless Steel	Brass	Detail
1/2"	90°	Std.	Std.		
		Sch. 40	Type 304 Sch. 40		
	180°	Std.	Std.		Std.
		EH 80	Type 316 Sch. 40		Sch. 40
1/4"	90°	Std.	Std.		
		Sch. 40	Type 304 Sch. 40		
	180°	Std.	Std.		Std.
		EH 80	Type 316 Sch. 40		Sch. 40

Rubber Gauge Covers

Helps protect the gauge from accidental damage. The 2" cover is slightly oversized on some gauges.

RUBBER GAUGE COVERS

Socket				
Dia	Style	CB	LM	Detail

- 1" Closed
- 2" Closed
- 2" Open

Pressure Snubbers

Snubbers reduce and/or eliminate pulsations which can damage gauges & delicate machinery and be the cause of faulty readings.

PRESSURE SNUBBERS

Dia	Model	Material	PSI	Detail
1"	Economy*	Brass	1,500	
1/8"	Porous**	Brass	3,000	
1"	Porous**	Brass	5,000	
1"	Porous**	Brass	5,000	
1"	Porous**	S/S	10,000	
1"	Porous**	S/S	10,000	
1"	Piston***	Brass	3,000	
1"	Piston***	S/S	5,000	

* Porous - Universal for most media

** Specify Media: G-Air/Gasses; E-Water; D-Oil

*** Piston Subbers supplied with 3 pistons for most media

P/T PLUGS FOR PRESSURE OR TEMPERATURE

A gauge mounted on an adapter can provide a simple, inexpensive and reliable solution where permanently installed gauges are subject to damage making them too costly to replace often. Insertion of up to 1/8" adapter with gauge or thermometer through self sealing Neoprene core in brass plug provides an instant reading. Vacuum to 1000 psi or up to 350°F.

P/T PLUGS

Size	Material	Temperature °F	Detail
	Plug/ Seal		
1"	Brass/ Neoprene	200°	
1"	Brass/ Neoprene	200°	

* Porous - Universal for most media

*1/8" & 3/8" plugs available on special order.

**Stainless Steel plugs, Nordeal seals available on special order.